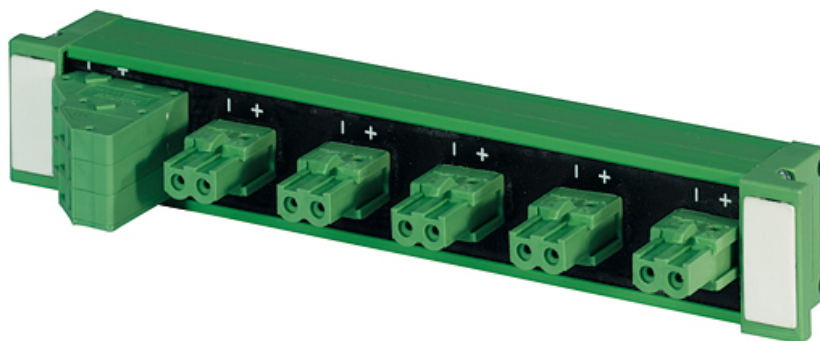


MASI20 installation technology Distributor AS-I and extern power, 3 potentials

5 ports, universal
3 potentials
5 plug terminals included

Image


Vicarious picture

Approvals

Technical Data

Operating voltage	max. 36 V DC
Current per connection	max. 8 A
Total current	max. 12 A
Isolation voltage	AS-Interface/Power 200 V, Power/Power 50 V (EN 60664-1)

General data

Protection	IP20
Temperature range	-20...+70 °C
Connection	Screw terminal: single wire (0.2...2.5 mm ²), stranded wire (0.2...1.5 mm ²)
Mounting method	DIN-rail mountable (EN 60715)


Commercial data

Net weight	87
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/13

Connection diagram

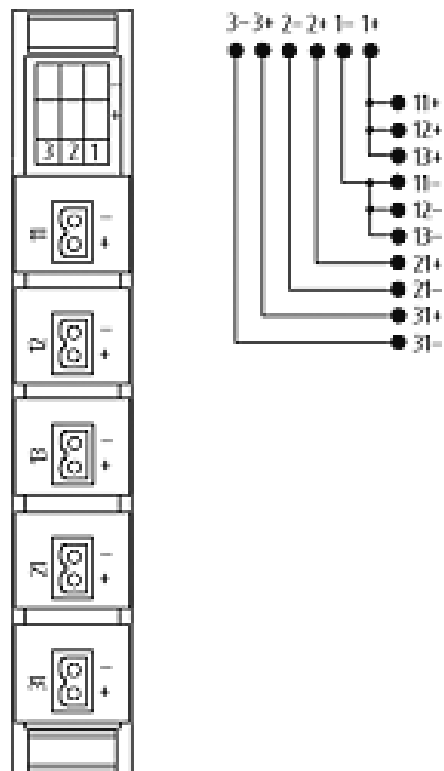

Dimension drawing

