


**MASI20 installation technology Distributor 2x AS-I and 3x extern power**

3 AS-Interface + 2 power ports  
5 plug terminals included

**Image**

Vicarious picture

**Approvals****Technical Data**

Operating voltage	max. 36 V DC
Current per connection	max. 8 A
Total current	max. 24 A
Isolation voltage	AS-Interface/Power 200 V, (EN 60664-1)

**General data**

Protection	IP20
Temperature range	-20...+70 °C
Connection	Screw terminal: single wire (0.25...4 mm <sup>2</sup> ), stranded wire (0.5...2.5 mm <sup>2</sup> )
Mounting method	DIN-rail mountable (EN 60715)


**Commercial data**

Net weight	87
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/13

## Connection diagram

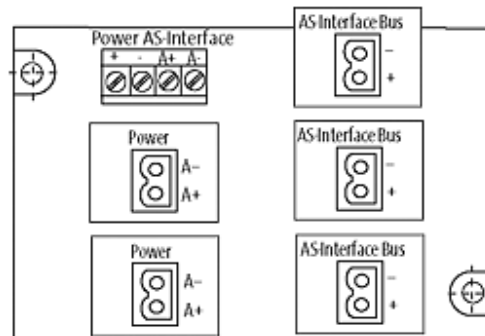

## Dimension drawing

