

MPL Power supply unit 3-phase, smoothed IN: 208-520VAC+/- 5% OUT: 24V/25ADC

Current: 25 A

Output rating: 600 W

Image



- touch protected (EN 61558)

Vicarious picture

Approvals



Input

Input voltage (external fuse)	3 × 208...520 V AC
Frequency	50/60 Hz

Output

Output voltage	24 V DC (SELV)
Output current	max. 25 A
Efficiency	73 %
Ripple	max. 2 % rms
Output fuse (external)	25 A T
Output filter	LED, VDR and smoothing capacitor

General data

Standards	(EN 61558-2-6), (EN 62041) category 1, (EN 55011 B), (EN 61000-3-2)
Temperature range	-20...+55 °C, for any mounting position at vertical wall, no condensation
Mounting method	Key-hole mounting
Dimensions H × W × D	220 x 103 x 213 mm
Fixing centers a × b × c	195 x 81 x 8.5 mm


Commercial data

Net weight	10800
Weight unit	gram
Basic unit	pc.
Customs tariff number	85044090
Unit (piece)	1
Limited value	1

Comments

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Circuit diagram

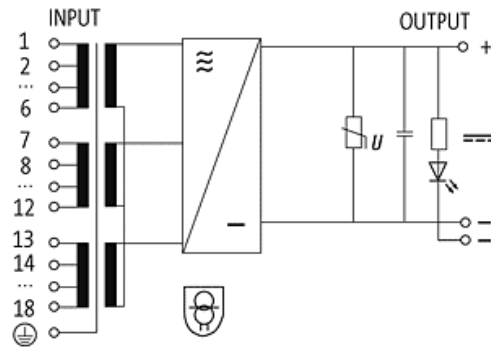

Dimension drawing

